

HOW TO MEASURE

APPLICATION: Indoor Outdoor

MOUNTING TO: Concrete Block Brick Sheet Rock
 Fence Concrete Metal Frame

HOW ARE THEY MOUNTING: Z-Brackets U-Channels Direct to Wall

PANEL BACKING: 7/16" OSB (indoor) 7/16" OSB (outdoor) _____

FOAM: 2" Poly Foam (outdoor) 2" Bonded Foam 3" Poly Foam


VINYL COVERING: 14 oz. Fire Retardent 18 oz. 18 oz. Fire Retardant

VINYL COLOR: WHITE GRAY BLACK GOLD ORANGE RED MAROON PURPLE NAVY ROYAL SKY BLUE TEAL KELLY GREEN FOREST GREEN BROWN TAN

GRAPHICS: Yes No **Details:**

CUT-OUTS: Yes No **Details:**

MEASUREMENTS WERE TAKEN FROM: Floor Top of Baseboard
 Height of Baseboard _____

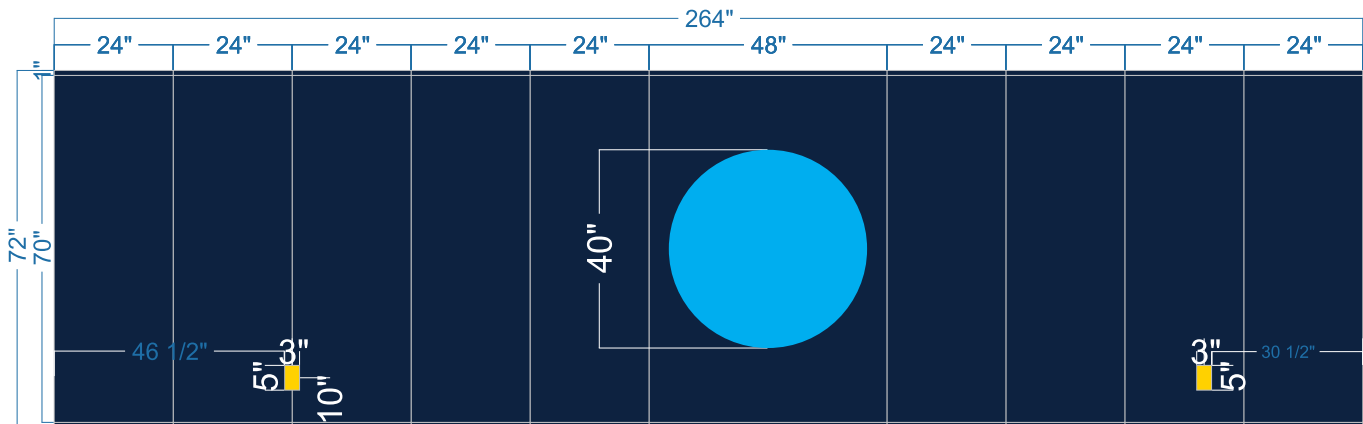

When measuring a wall, the more details given the better. Begin by determining how tall & wide the pads should be. (Standard is 72"H x 24"W or 72"H x 48"W). Indicate if you are measuring from the floor or from the baseboard for cut outs & art. Top and bottom of each cut-out should be included in your sketch, also include how far in the cut-out starts. Do not assume large openings are straight, give top and bottom distances for these opening.

